



120 Watt Series

Desktop Type

Green Mode

CEC , Energy Star Level V & ErP Stage 2
No Load Power Consumption Less Than 0.5W


Features:

- 100-240VAC Universal Input
- Single Output to 120W
- Regulated Output with Low Ripple Noise
- Safety Agency Requirements and EMI/EMS Certified
- Private Label Marking Available
- Modified and Custom Design Available
- 1 Year Warranty

Model	O/P Voltage	O/P Current	Watt
STD-12090(*)	12V	9.0A	108 W
STD-15080	15V	8.0A	120 W
STD-16075	16V	7.5A	120 W
STD-18066	18V	6.6A	120 W
STD-19063	19V	6.3A	120 W
STD-20060	20V	6.0A	120 W
STD-24050(*)	24V	5.0A	120 W
STD-30040	30V	4.0A	120 W
STD-48025	48V	2.5A	120 W
STD-56021	56V	2.15A	120 W

Input	
Voltage	100-240 VAC
Line Frequency	50-60Hz
Current	1.6A Max.
Protection	Internal Primary Current Fuse, Inrush Limiting
Configuration	IEC320/ C6, C14

Output	
Load Regulation	± 5% (Typical)
Ripple	1~2% V p-p Max. for Output Voltage @ Full Load
Transient Response	0.5mS for 50% Load Change Typical
Holdup Time	10mS @ Full Load
Protection	Short Circuit Protection/ Over Voltage Protection/ Over Current Protection/Over Temperature Protection
DC Cord	18AWG / 16AWG / 14AWG
Ferrite Core	Yes

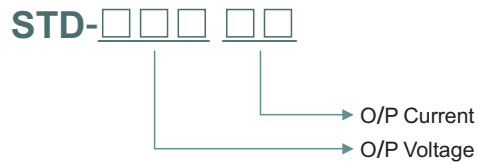

Safety Approvals

CB / UL / cUL / FCC / GS / CE / PSE / BSMI / CCC / RCM / KC

(*)With KC mark

Electrical

Topology	Switching Flyback
Dielectric Withstand	3000 VAC Primary - Secondary
Leakage Current	3.5mA @ 3 Pin
Efficiency	Energy Star Level V & ErP Stage 2 & MEPS Certified
EMI Conduction & Radiation	Compliance to EN55022 Class B
Harmonic Current	Compliance to EN61000-3-2,3
EMS Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11
MTBF	50,000 Calculated Hours at 25°C, by MIL-HDBK-217F

Environmental

Operating Temperature	0 to+40°C
Storage Temperature	-20 to+80°C
Relative Humidity	Operating: 20 to 80% RH Storage: 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical

Case Dimension	L168 x W66 x H39 (mm)
Weight	590g (Ref.)



R33154 RoHS